


3,4,5,7 - возможные прерывания для каждого из портов или **общее** для обоих



200H-3F8H – Диапазон возможных адресов
Сертифицировано для систем **Shopping**

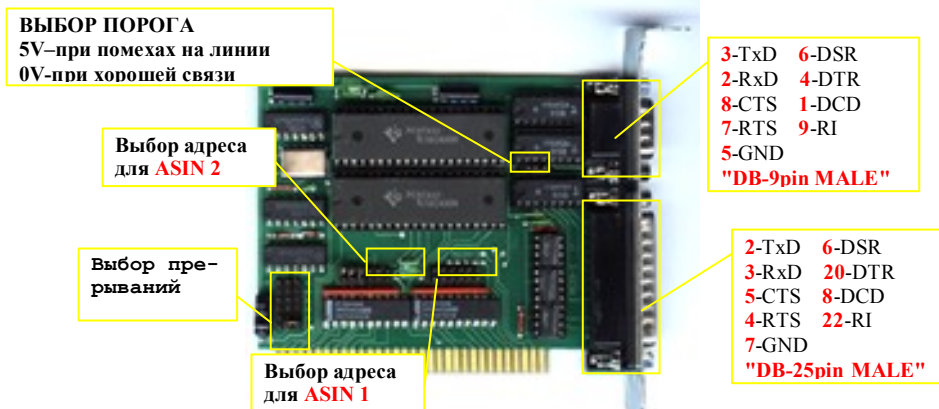

ВЫБОР АДРЕСА ПОРТОВ

ВЫБОР ПРЕРЫВАНИЙ

ADD	S1	S2	S3	S4	S5	S6	ADD	S1	S2	S3	S4	S5	S6
200	1	1	1	1	1	1	300	1	1	1	1	1	0
208	0	1	1	1	1	1	308	0	1	1	1	1	0
210	1	0	1	1	1	1	310	1	0	1	1	1	0
218	0	0	1	1	1	1	318	0	0	1	1	1	0
220	1	1	0	1	1	1	320	1	1	0	1	1	0
228	0	1	0	1	1	1	328	0	1	0	1	1	0
230	1	0	0	1	1	1	330	1	0	0	1	1	0
238	0	0	0	1	1	1	338	0	0	0	1	1	0
240	1	1	1	0	1	1	340	1	1	1	0	1	0
248	0	1	1	0	1	1	348	0	1	1	0	1	0
250	1	0	1	0	1	1	350	1	0	1	0	1	0
258	0	0	1	0	1	1	358	0	0	1	0	1	0
260	1	1	0	0	1	1	360	1	1	0	0	1	0
268	0	1	0	0	1	1	368	0	1	0	0	1	0
270	1	0	0	0	1	1	370	1	0	0	0	1	0
278	0	0	0	0	1	1	378	0	0	0	0	1	0
280	1	1	1	1	0	1	380	1	1	1	1	0	0
288	0	1	1	1	0	1	388	0	1	1	1	0	0
290	1	0	1	1	0	1	390	1	0	1	1	0	0
298	0	0	1	1	0	1	398	0	0	1	1	0	0
2A0	1	1	0	1	0	1	3A0	1	1	0	1	0	0
2A8	0	1	0	1	0	1	3A8	0	1	0	1	0	0
2B0	1	0	0	1	0	1	3B0	1	0	0	1	0	0
2B8	0	0	0	1	0	1	3B8	0	0	0	1	0	0
2C0	1	1	1	0	0	1	3C0	1	1	1	0	0	0
2C8	0	1	1	0	0	1	3C8	0	1	1	0	0	0
2D0	1	0	1	0	0	1	3D0	1	0	1	0	0	0
2D8	0	0	1	0	0	1	3D8	0	0	1	0	0	0
2E0	1	1	0	0	0	1	3E0	1	1	0	0	0	0
2E8	0	1	0	0	0	1	3E8	0	1	0	0	0	0
2F0	1	0	0	0	0	1	3F0	1	0	0	0	0	0
2F8	0	0	0	0	0	1	3F8	0	0	0	0	0	0



ВНИМАНИЕ !!! При использовании объединенного прерывания, перемычки выбора прерываний для каждого из портов должны быть удалены.